

PLANT SERVICE CENTER OPERATIONS
 STATION NUMBER CARDS - TRANSPARENT WINDOWS

Contents	Page
1. GENERAL	1
2. DESCRIPTION OF FORMS	1
3. KEY SYSTEM STATIONS.....	3

(b) Showing the use of turn-buttons and sliding switches (2 line pickup, bell cut-off, etc.)

1.02 The Plant Service Center shall send the required windows to the field with the service order.

1. GENERAL

1.01 This section covers imprinted transparent windows used in lieu of the standard windows for:


1.03 More than one imprinted transparent window may be used at a station when required. The number card can easily be seen through as many as three windows.

- (a) Identifying stations on key telephone systems (A-B-C, etc.)

2. DESCRIPTION OF FORMS

Form


Use



Identifies each key system station having single letter. See 3.02 and 3.04.

NOTE: Letters A to U in red (excluding letter I) imprinted slightly to the right of center.

Figure 1 - P-2354



Used with form P-2354 to identify key system stations having two letters. See 3.02 and 3.05.

NOTE: Letters A to P (excluding I) imprinted in red slightly to the left of center. This form when used with Form P-2354 provides 320 letter combinations.

Figure 2 - P-2355

Form




Figure 3 - E-4609

Use

Indicates which line, either Line 1 or Line 2, is connected to the set as determined by the position of the turn-button.




Figure 4 - E-4610

Indicates the ON or OFF position of the turn-button which may control external lamp indicators, extension gong, ringers, head sets, etc.




Figure 5 - E-4614

Indicates whether the central office line or local line is connected to the set as determined by the position of the turn-button.





Figure 6 - E-4615

Indicates whether the central office line or private line is connected to the set as determined by the position of the turn-button.


Form

Use



Indicates which line is connected to the set as determined by the position of the sliding key on Home Interphone Systems.

Figure 7 - E-4809



Indicates which line is connected to the set as determined by the position of the sliding key on Home Interphone Systems.

Figure 8 - E-4810

3. KEY SYSTEM STATIONS

3.01 Each station on a key telephone system shall be alphabetically identified (A-B-C, etc.)

3.02 The letter assigned to each station shall be the same as shown on the work sheet or Square Plan Order for the system involved.

3.03 Forms P-2354 and P-2355 are used for the purpose of identifying each key system station. See figures 1 and 2.

3.04 Form P-2354 is used to identify a key system station with a single letter.

3.05 Forms P-2354 and P-2355, placed one on top of the other, are used to identify key system stations with two letters.

These forms, one on top of the other, would look as shown in Figure 9.

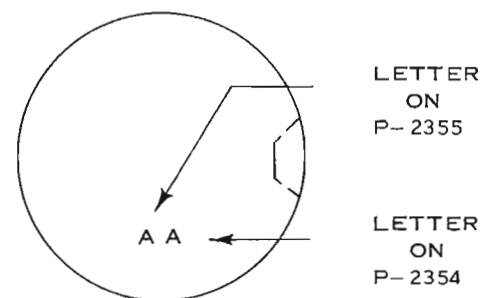


Figure 9

LETTER
ON
P- 2355

LETTER
ON
P- 2354