

HAND SETS E1B TYPE DESCRIPTION AND USE

1. GENERAL

1.01 This section gives general information pertaining to the E1B type hand set, such as its use, description, piece parts, and the combination of apparatus that is either included in its assembly code or has to be specified in ordering.

2. DESCRIPTION

2.01 The E1B type hand set is shown in the following figure.

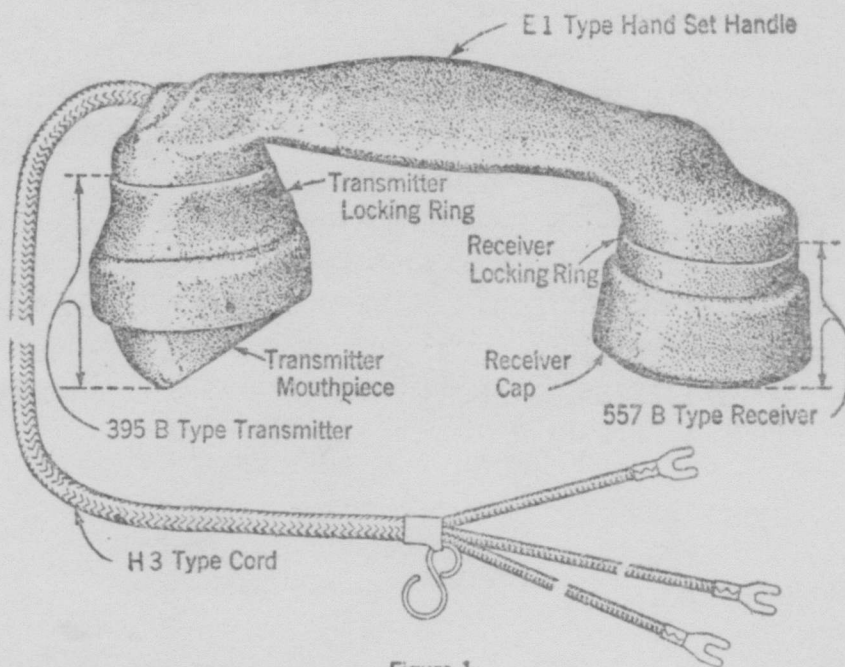


Figure 1.

3. USE

3.01 The E1B type hand set with hand set mountings is for general use at stations.

4. APPARATUS

4.01 The E1B type hand set consists of the following apparatus and piece parts:

- (a) One E1 Type Hand Set Handle
- (b) One 557B Type Receiver
 - Receiver Cap.....P-208590 (Black only)
 - Receiver Diaphragm.....P-98387
 - Receiver Locking Ring.....P-208591 (Black only)
- (c) One 395B Type Transmitter
 - Transmitter Locking Ring..P-213225 (Black only)
 - Transmitter Mouthpiece...P-213223 (Black only)
 - Transmitter Unit.....395-B Transmitter Unit
- (d) One H3B Type Cord, 4 ft. (Hand Set Cord. See table, Paragraph 4.03, for code.)

Note: Where a long hand set cord is specified, use a 9 ft. H3B type cord.

4.02 When a water-proof hand set cord is required, use an H3C cord. This cord is available in standard lengths of 4 ft. and 9 ft.

4.03 The E1B type hand set, with cord to harmonize, is furnished in colors as listed below. The dash (— number) part of the hand set code indicates the color, and must always be specified in ordering.

Color	Hand Set *Code	Hand Set Cord Code
Black.....	E1B-3.....	H3B-9
Ivory.....	E1B-4.....	H3B-4
Gray.....	E1B-5.....	H3B-5
Old Brass.....	E1B-6.....	H3B-10
Statuary Bronze.....	E1B-7.....	H3B-10
Oxidized Silver.....	E1B-8.....	H3B-5
Medium Gold.....	E1B-11.....	H3B-11
Dark Gold.....	E1B-12.....	H3B-11

*Includes cord.