

PLUGS

TYPES FOR INSIDE LOCATIONS CORDING

1. GENERAL


1.01 This section covers the cording of plugs of the types used in connection with jack and plug installations at inside locations.

1.02 When connecting cords to plugs, make connections as indicated by the color designations stamped adjacent to the terminals of the newer types of plugs. Where no color designations are stamped adjacent to terminals of plug (148 type plug), make connections as indicated in Fig. 1.


1.03 If a portable station, including induction coil subscriber set is installed on a telephone table, connect the green and red conductors of portable cord to L_2 and L_1 of subscriber set, respectively, and tape back the yellow conductor at the subscriber set end. If signaling ground is required, use the yellow conductor for this purpose and connect the green and red conductors to the line terminals of subscriber set in accordance with standard instructions.

2. CORDING


273A TYPE PLUG

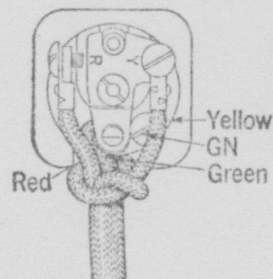

METHOD OF TYING STRAIN KNOT



148 TYPE PLUG

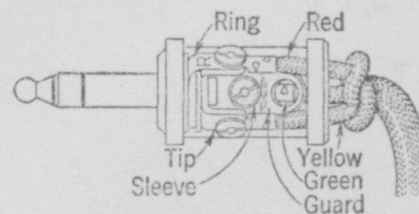

Place cord tip for sleeve connection under guard.

Fig. 1

274A TYPE PLUG

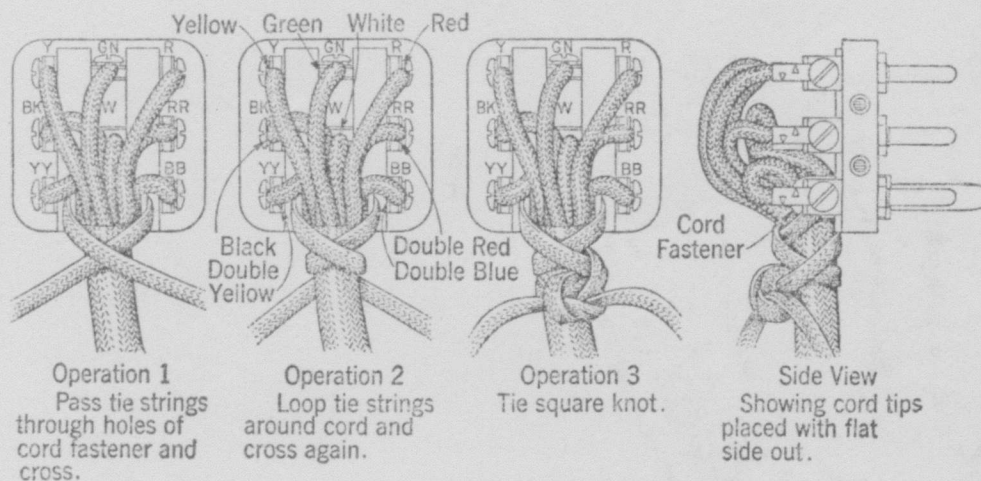


Fig. 2

283A TYPE PLUG

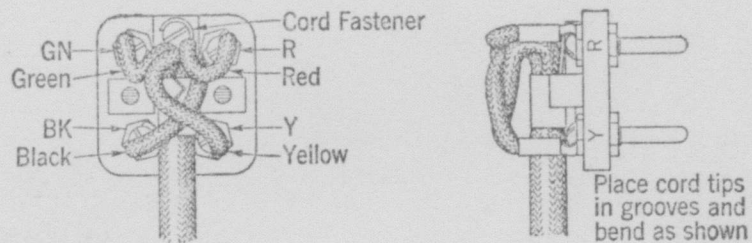


Fig. 3